



Siebel Eltron SUL 2/1 plus
colector solar montat pe acoperis

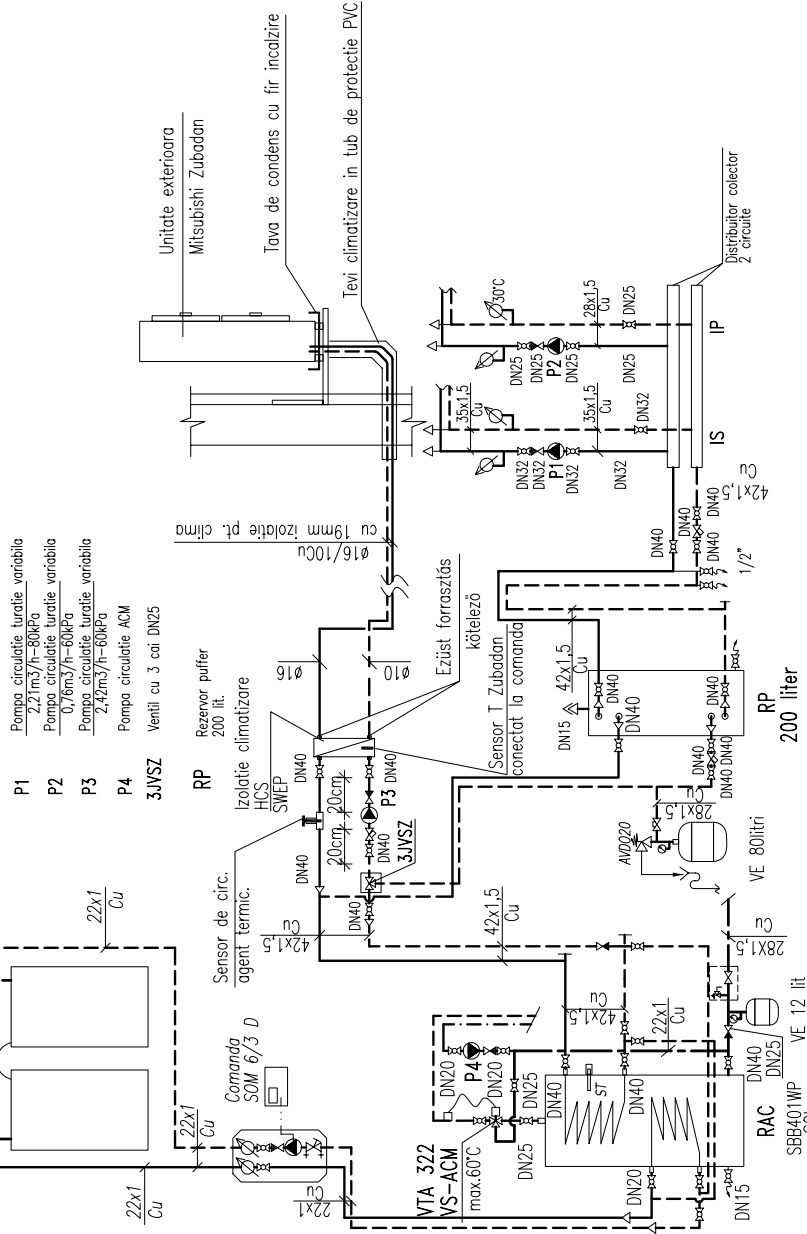

- P1 Pompa circulatie turatie variabila 2,2 l/m³/h-80kPa
- P2 Pompa circulatie turatie variabila 0,7 l/m³/h-60kPa
- P3 Pompa circulatie turatie variabila 2,4 l/m³/h-60kPa
- P4 Pompa circulatie ACM
- 3JNSZ Ventil cu 3 cai DN25
- RP Rezervor puffer 200 lit.

Observatii:
Setari unitate interioara Mitsubishi Zubadan
Incalzire 35/30°C, Racire 17/21°C

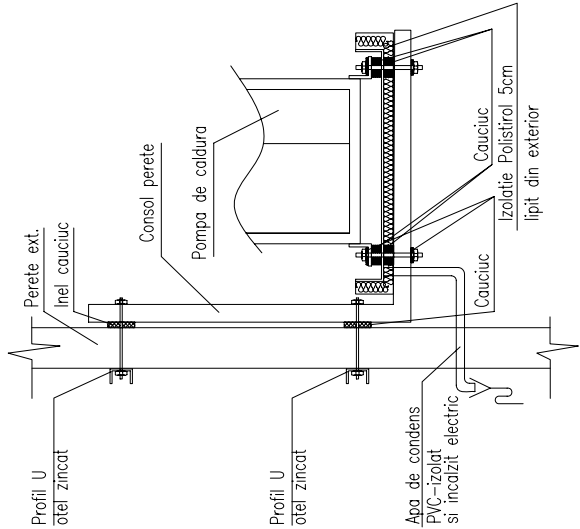

LEGENDA

- Conducta incalzire tur
- Conducta incalzire retur
- Termostat digital incalzire/racire 220V
- Tavan cu incalzire/racire prin suprafata sistem tercatit
- Tavan cu incalzire/racire prin suprafata sistem uscat
- Perete cu incalzire/racire prin suprafata
- Camp de incalzire prin pardoseala

Index comp. MF122 100 pas tevi
Suprafata S=7,3m² Nr. circuite si lung.
N=3buc./Leg.=28m